


LINESCAPES SYSTEM

Linescapes is a modular system that, installed both on the ceiling and on the wall, completely changes the approach to direct and indirect lighting. Highly performing both in the linear and spot version. The singular modules are connected by quick moulded polymer connectors, which enable rapid jack installation and a 360° rotation. The different elements allow the composition of continuous lines and edges, with a luminous efficiency and an excellent diffusion degree, through an opaline diffuser in polycarbonate. The system has been studied to provide user friendly maintenance. Nemo has efficiently solved the problem of replacing LED built-in sources, whereby the single lighting elements can be easily changed.

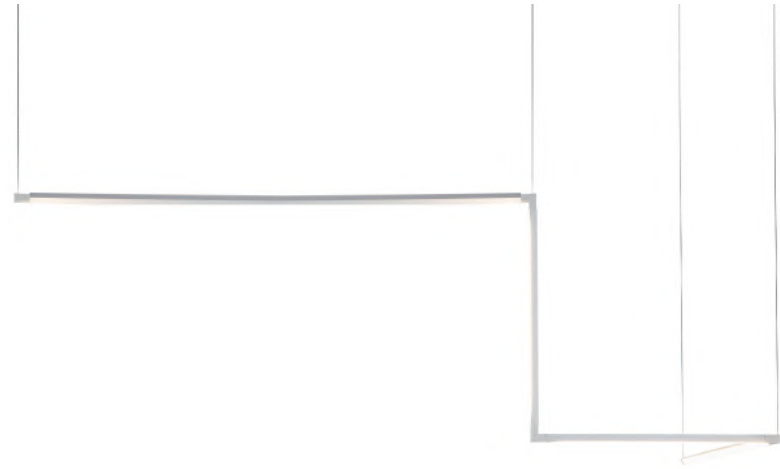

LED SEGMENTS | 36CM - 2700K

LAMPING

Source	Linear LED
Total power	6W
Emission	diffused orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	2700K
Luminous flux	335lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°


Codes

LSS LW8 51
LSS LN8 51

Structure

white
black

Certificazioni

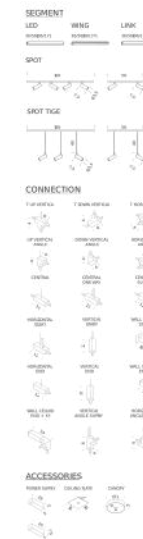

LED SEGMENTS | 56CM - 2700K

LAMPING

Source	Linear LED
Total power	9,5W
Emission	diffused orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	2700K
Luminous flux	600 lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°


Codes

LSS LW7 51
LSS LN7 51

Structure

white
black

Certificazioni

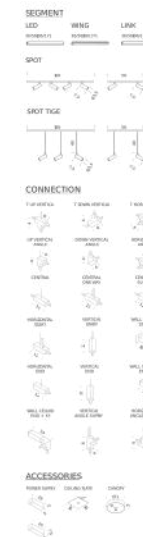

LED SEGMENTS | 106CM - 2700K

LAMPING

Source	linear LED
Total power	19W
Emission	diffused orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	2700K
Luminous flux	1125lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°

Codes

LSS LW6 51
LSS LN6 51


Structure

white
black

PACKAGE

Package 01 Dimension: 110x5x5 cm

Certificazioni

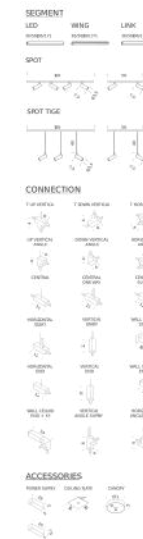

LED SEGMENTS | 171CM - 2700K

LAMPING

Source	linear LED
Total power	33W
Emission	diffused orientable 360°
Switching	dimnable according to driver
Tension	24V DC
Color temperature	2700K
Luminous flux	1765lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°

Codes

LSS LW5 51
LSS LN5 51


Structure

white
black

PACKAGE

Package 01 Dimension: 175x5x5 cm

Certificazioni

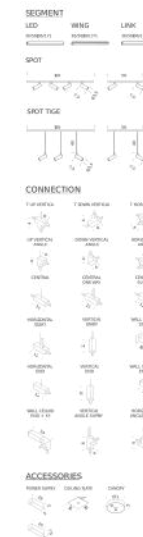

LED SEGMENTS | 36CM - 3000K

LAMPING

Source	linear LED
Total power	6W
Emission	diffused, orientable 360°
Switching	dimnable according to driver
Tension	24V DC
Color temperature	3000K
Luminous flux	335lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°

Codes

LSS LW4 51
LSS LN4 51


Structure

white
black

PACKAGE

Package 01 Dimension: 40x5x5 cm

Certificazioni

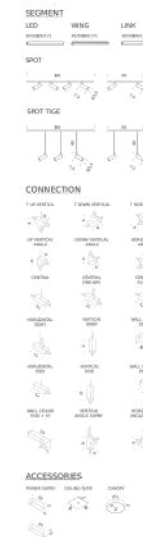

LED SEGMENTS | 56CM - 3000K

LAMPING

Source	linear LED
Total power	9,5W
Emission	diffused, orientable 360°
Switching	dimnable according to driver
Tension	24V DC
Color temperature	3000K
Luminous flux	600lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°

Codes

LSS LW3 51
LSS LN3 51


Structure

white
black

PACKAGE

Package 01 Dimension: 60x5x5 cm

Certificazioni

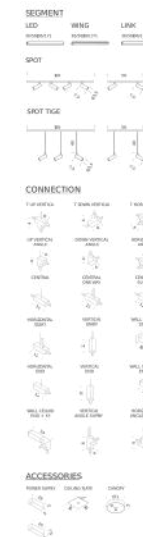

LED SEGMENTS | 106CM - 3000K

LAMPING

Source	linear LED
Total power	19W
Emission	diffused, orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	3000K
Luminous flux	1125lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°

Codes

LSS LW2 51
LSS LN2 51


Structure

white
black

PACKAGE

Package 01 Dimension: 110x5x5 cm

Certificazioni

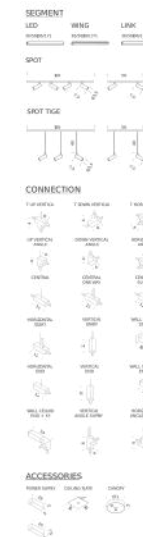

LED SEGMENTS | 171CM - 3000K

LAMPING

Source	linear LED
Total power	33W
Emission	diffused, orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	3000K
Luminous flux	1765lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°

Codes

LSS LW1 51
LSS LN1 51


Structure

white
black

PACKAGE

Package 01 Dimension: 175x5x5 cm

Certificazioni

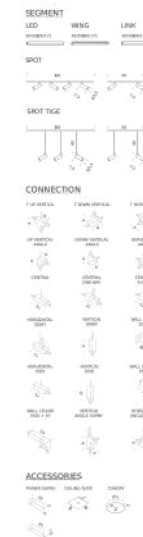

LINK SEGMENTS | 36CM

LAMPING

Materials

aluminium + PC + ABS

Notes

24V electrical connection, orientable 360°, no light

Codes

LSS BW4 51

Structure

white

LSS BN4 51


black

PACKAGE

Package 01

Dimension: 40x5x5 cm

Certificazioni

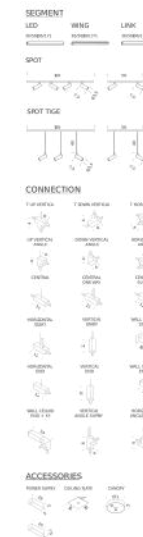

LINK SEGMENTS | 56CM

LAMPING

Materials

aluminium + PC + ABS

Notes

24V electrical connection, orientable 360°, no light

Codes

LSS BW3 51

Structure

white

LSS BN3 51


black

PACKAGE

Package 01

Dimension: 60x5x5 cm

Certificazioni

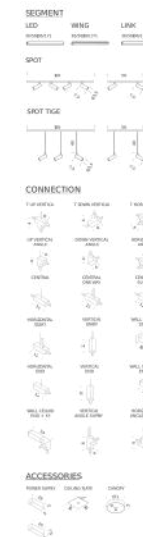

LINK SEGMENTS | 106CM

LAMPING

Materials

aluminium + PC + ABS

Notes

24V electrical connection, orientable 360°, no light

Codes

LSS BW2 51

Structure

white

LSS BN2 51


black

PACKAGE

Package 01

Dimension: 110x5x5 cm

Certificazioni

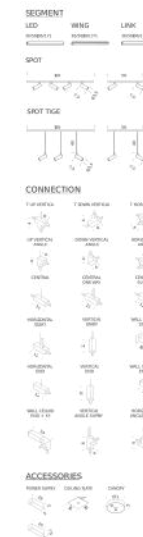

LINK SEGMENTS | 171CM

LAMPING

Materials

aluminium + PC + ABS

Notes

24V electrical connection, orientable 360°, no light

Codes

LSS BW1 51

Structure

white

LSS BN1 51


black

PACKAGE

Package 01

Dimension: 175x5x5 cm

Certificazioni

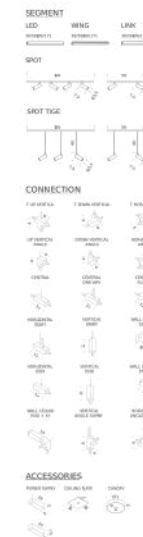

WING SEGMENTS | 36CM - 2700K

LAMPING

Source	Linear LED
Total power	6W
Emission	diffused orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	2700K
Luminous flux	335lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°

Codes

LSS UW8 51
LSS UN8 51

Structure

white
black

Certificazioni



WING SEGMENTS | 56CM - 2700K

LAMPING

Source	Linear LED
Total power	9,5W
Emission	diffused orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	2700K
Luminous flux	600lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°


Codes

LSS UW7 51
LSS UN7 51

Structure

white
black

Certificazioni

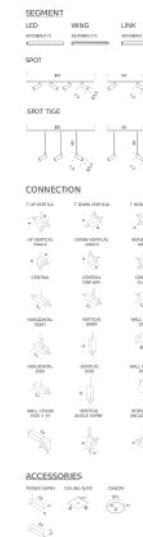

WING SEGMENTS | 106CM - 2700K

LAMPING

Source	Linear LED
Total power	19W
Emission	diffused orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	2700K
Luminous flux	1125lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°


Codes

LSS UW6 51
LSS UN6 51

Structure

white
black

Certificazioni

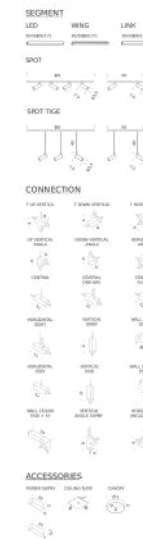

WING SEGMENTS | 171CM - 2700K

LAMPING

Source	Linear LED
Total power	33W
Emission	diffused orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	2700K
Luminous flux	1765lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°

Codes

LSS UW5 51
LSS UN5 51

Structure

white
black

Certificazioni



WING SEGMENTS | 36CM - 3000K

LAMPING

Source	Linear LED
Total power	6W
Emission	diffused orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	3000K
Luminous flux	335lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°


Codes

LSS UW4 51
LSS UN4 51

Structure

white
black

Certificazioni

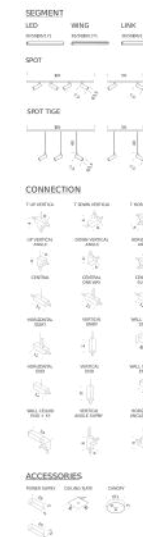

WING SEGMENTS | 56CM - 3000K

LAMPING

Source	Linear LED
Total power	9,5W
Emission	diffused orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	3000K
Luminous flux	600lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°


Codes

LSS UW3 51
LSS UN3 51

Structure

white
black

Certificazioni

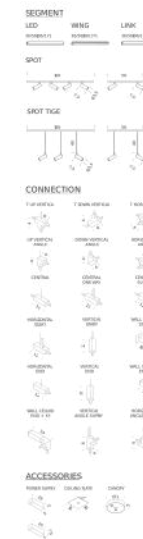

WING SEGMENTS | 106CM - 3000K

LAMPING

Source	Linear LED
Total power	19W
Emission	diffused orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	3000K
Luminous flux	1125lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°


Codes

LSS UW2 51
LSS UN2 51

Structure

white
black

Certificazioni

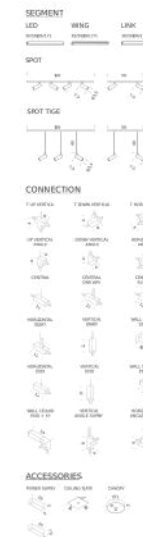

WING SEGMENTS | 171CM - 3000K

LAMPING

Source	Linear LED
Total power	33W
Emission	diffused, orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	3000K
Luminous flux	1765lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable 360°


Codes

LSS UW1 51
LSS UN1 51

Structure

white
black

Certificazioni

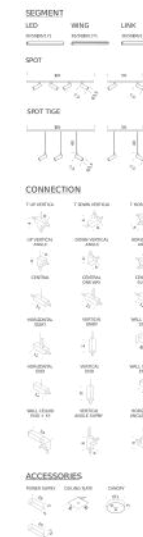

SPOT SEGMENTS | TIGE 2 SPOT 56CM - 2700K

LAMPING

Source	LED SPOT
Total power	2x4 W
Emission	diffused, orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	2700K
Luminous flux	2x400lm
Typ cri	90
Energy class	A+
Materials	metal + PMMA + PC + ABS
Notes	orientable 90°/340°


Codes

LSS SW1 51
LSS SN1 51

Structure

white
black

Certificazioni

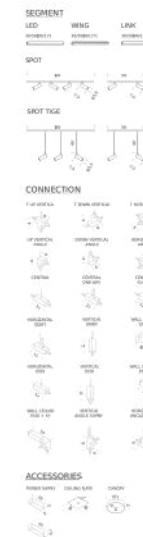

SPOT SEGMENTS | TIGE 3 SPOT 106CM - 2700K

LAMPING

Source	LED SPOT
Total power	3x4 W
Emission	diffused, orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	2700K
Luminous flux	3x400lm
Typ cri	90
Energy class	A+
Materials	metal + PMMA + PC + ABS
Notes	orientable 90°/340°

Codes

LSS SW2 51
LSS SN2 51

Structure

white
black

Certificazioni



SPOT SEGMENTS | TIGE 2 SPOT 56CM - 3000K

LAMPING

Source	LED SPOT
Total power	2x4 W
Emission	diffused, orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	3000K
Luminous flux	2x400lm
Typ cri	90
Energy class	A+
Materials	metal + PMMA + PC + ABS
Notes	orientable 90°/340°

Codes

LSS SW3 51


LSS SN3 51

Structure

white

black

Certificazioni

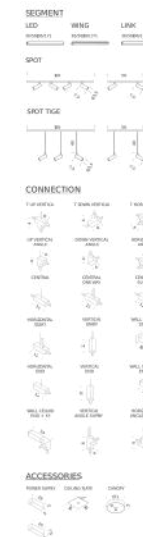

SPOT SEGMENTS | TIGE 3 SPOT 106CM - 3000K

LAMPING

Source	LED SPOT
Total power	3x4 W
Emission	diffused, orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	3000K
Luminous flux	3x400lm
Typ cri	90
Energy class	A+
Materials	metal + PMMA + PC + ABS
Notes	orientable 90°/340°


Codes

LSS SW4 51
LSS SN4 51

Structure

white
black

Certificazioni

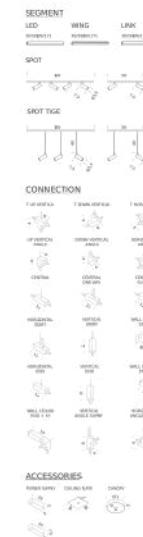

SPOT SEGMENTS | 2 SPOT 56CM - 2700K

LAMPING

Source	LED SPOT
Total power	2x4 W
Emission	diffused, orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	2700K
Luminous flux	2x400lm
Typ cri	90
Energy class	A+
Materials	metal + PMMA + PC + ABS
Notes	orientable 90°/340°


Codes

LSS SW5 51
LSS SN5 51

Structure

white
black

Certificazioni

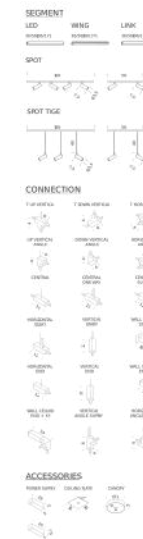

SPOT SEGMENTS | 2 SPOT 56CM - 3000K

LAMPING

Source	LED SPOT
Total power	2x4 W
Emission	diffused, orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	3000K
Luminous flux	2x400lm
Typ cri	90
Energy class	A+
Materials	metal + PMMA + PC + ABS
Notes	orientable 90°/340°


Codes

LSS SW7 51
LSS SN7 51

Structure

white
black

Certificazioni

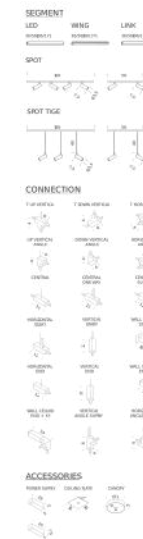

SPOT SEGMENTS | 4 SPOT 106CM - 2700K

LAMPING

Source	LED SPOT
Total power	2x4 W
Emission	diffused, orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	2700K
Luminous flux	4x400lm
Typ cri	90
Energy class	A+
Materials	metal + PMMA + PC + ABS
Notes	orientable 90°/340°


Codes

LSS SW6 51
LSS SN6 51

Structure

white
black

Certificazioni

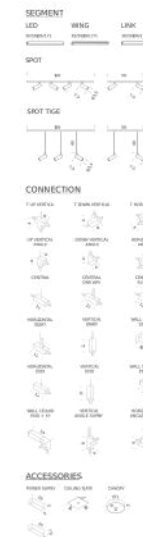

SPOT SEGMENTS | 4 SPOT 106CM - 3000K

LAMPING

Source	LED SPOT
Total power	2x4 W
Emission	diffused, orientable 360°
Switching	dimmable according to driver
Tension	24V DC
Color temperature	3000K
Luminous flux	4x400lm
Typ cri	90
Energy class	A+
Materials	metal + PMMA + PC + ABS
Notes	orientable 90°/340°


Codes

LSS SW8 51
LSS SN8 51

Structure

white
black

Certificazioni

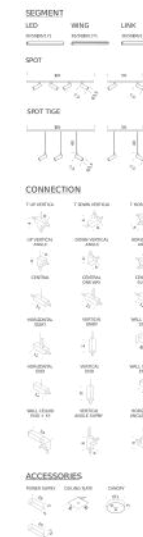

CONNECTIONS | T UP VERTICAL

LAMPING

Materials

PC+ABS

Notes

cable length 3m

Codes

LSS TN2 51


Structure

black

LSS TW2 51

white

Certificazioni

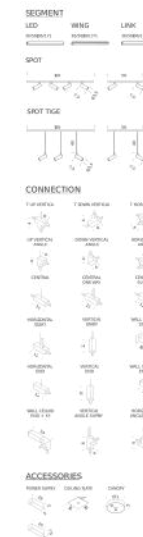

CONNECTIONS | T DOWN VERTICAL

LAMPING

Materials

PC+ABS

Codes

LSS TN1 51


LSS TW1 51

Structure

black

white

Certificazioni



CONNECTIONS | T HORIZONTAL

LAMPING

Materials

PC+ABS

Notes

cable length 3m

Codes

LSS TN3 51

Structure

black

LSS TW3 51

white

Certificazioni



CONNECTIONS | UP VERTICAL ANGLE

LAMPING

Materials

PC+ABS

Notes

cable length 3m

Codes

LSS AW1 51

Structure

white

LSS AN1 51


black

PACKAGE

Package 01

Dimension: 10x10x2 cm

Certificazioni

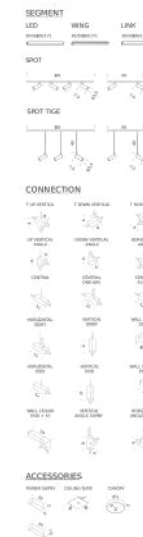

CONNECTIONS | DOWN VERTICAL ANGLE

LAMPING

Materials

PC+ABS

Codes

LSS AW2 51

LSS AN2 51

Structure

white


black

PACKAGE

Package 01

Dimension: 10x10x2 cm

Certificazioni

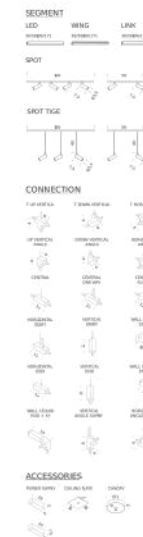

CONNECTIONS | HORIZONTAL ANGLE

LAMPING

Materials

PC+ABS

Notes

cable length 3m

Codes

LSS AW3 51

Structure

white

LSS AN3 51


black

PACKAGE

Package 01

Dimension: 10x10x2 cm

Certificazioni

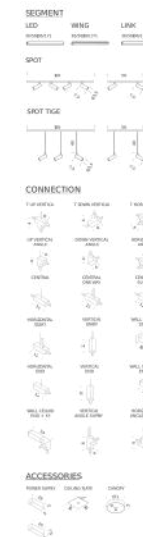

CONNECTIONS | CENTRAL

LAMPING

Materials

PC+ABS

Notes

cable length 3m

Codes

LSS CW5 51

Structure

white

LSS CN5 51

black

Certificazioni



CONNECTIONS | CENTRAL ONE WAY

LAMPING

Materials

PC+ABS

Notes

cable length 3m

Codes

LSS CW7 51


Structure

white

LSS CN7 51

black

Certificazioni

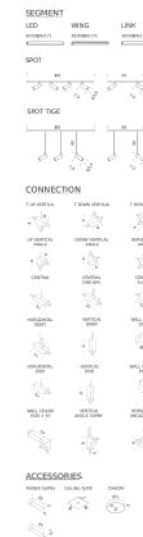

CONNECTIONS | CENTRAL SUPPLY

LAMPING

Materials

PC+ABS

Notes

cable length 3m

Codes

LSS CW4 51


Structure

white

LSS CN4 51

black

Certificazioni

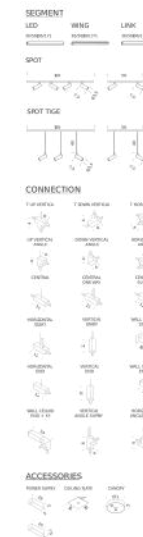

CONNECTIONS | HORIZONTAL START

LAMPING

Materials

PC+ABS

Notes

cable length 3m

Codes

LSS CW2 51

Structure

white

LSS CN2 51

black

Certificazioni



CONNECTIONS | VERTICAL START

LAMPING

Materials

PC+ABS

Notes

cable length 3m

Codes

LSS CW1 51


Structure

white

LSS CN1 51

black

Certificazioni

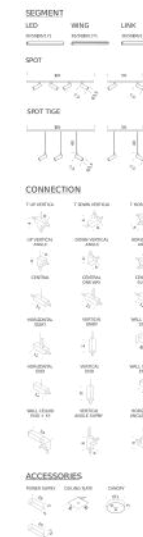

CONNECTIONS | WALL CEILING START

LAMPING

Materials

PC+ABS

Codes

LSS FW3 41

LSS FN3 41

Structure

white

black

Certificazioni



CONNECTIONS | HORIZONTAL END

LAMPING

Materials

PC+ABS

Notes

cable length 3m

Codes

LSS CW3 51


Structure

white

LSS CN3 51

black

Certificazioni

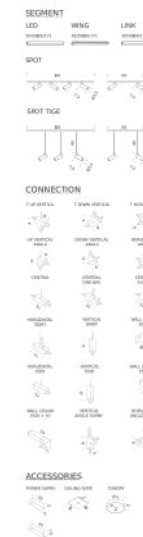

CONNECTIONS | VERTICAL END

LAMPING

Materials

PC+ABS

Notes

cable length 3m

Codes

LSS CW6 51

Structure

white

LSS CN6 51

black

Certificazioni



CONNECTIONS | WALL CEILING END

LAMPING

Materials

PC+ABS

Codes

LSS FW1 41


LSS FN1 41

Structure

white

black

Certificazioni

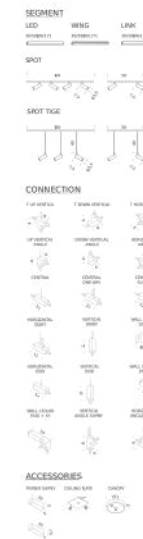

CONNECTIONS | WALL CEILING + XYZ

LAMPING

Materials

PC+ABS

Codes

LSS FW2 4

LSS FN2 41

Structure

white

black

Certificazioni



CONNECTIONS | VERTICAL ANGLE SUPPLY

LAMPING

Materials

PC+ABS

Notes

cable length 3m

Codes

LSS AW4 51


Structure

white

LSS AN4 51

black

Certificazioni

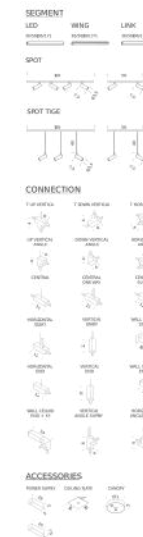

CONNECTIONS | HORIZONTAL ANGLE SUPPLY

LAMPING

Materials

PC+ABS

Notes

cable length 3m

Codes

LSS AW5 51


Structure

white

LSS AN5 51

black

Certificazioni

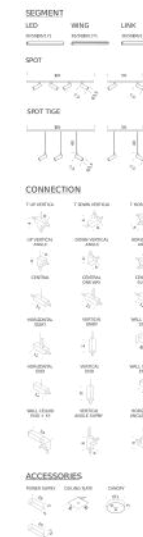

DESK MATRIX | 44X44CM - HORIZONTAL 2700K

LAMPING

Source	Linear LED
Total power	24W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	1340lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSH LW2 51
LSH LN2 51

Structure

white
black

Certificazioni

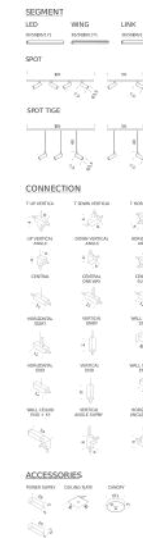

DESK MATRIX | 44X44CM - VERTICAL 2700K

LAMPING

Source	Linear LED
Total power	24W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	1340lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW2 51
LSV LN2 51

Structure

white
black

Certificazioni

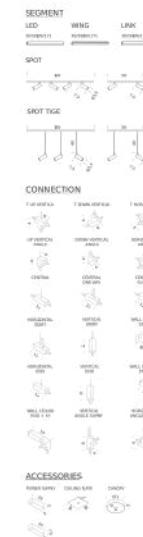

DESK MATRIX | 44X44CM - HORIZONTAL 3000K

LAMPING

Source	Linear LED
Total power	24W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	1340lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSH LW3 51
LSH LN3 51

Structure

white
black

Certificazioni

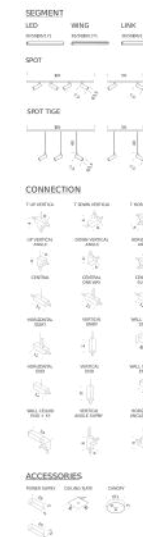

DESK MATRIX | 44X44CM - VERTICAL 3000K

LAMPING

Source	Linear LED
Total power	24W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	1340lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m

Codes

LSV LW3 51
LSV LN3 51

Structure

white
black

Certificazioni



DESK MATRIX | 64X44CM - HORIZONTAL 2700K

LAMPING

Source	Linear LED
Total power	31W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	1870lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSH LW2 55
LSH LN2 55

Structure

white
black

Certificazioni

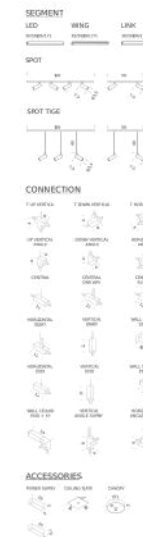

DESK MATRIX | 64X44CM - VERTICAL 2700K

LAMPING

Source	Linear LED
Total power	31W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	1870lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW2 55
LSV LN2 55

Structure

white
black

Certificazioni

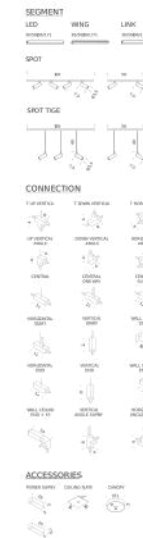

DESK MATRIX | 64X44CM - HORIZONTAL 3000K

LAMPING

Source	Linear LED
Total power	31W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	1870lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m

Codes

LSH LW3 55
LSH LN3 55

Structure

white
black

Certificazioni



DESK MATRIX | 64X44CM - VERTICAL 3000K

LAMPING

Source	Linear LED
Total power	31W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	1870lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW3 55
LSV LN3 55

Structure

white
black

Certificazioni

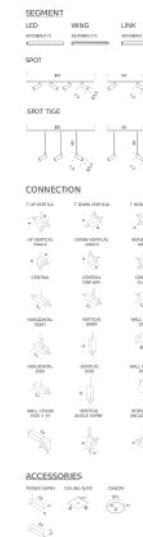

DESK MATRIX | 114X44CM - HORIZONTAL 2700K

LAMPING

Source	Linear LED
Total power	50W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	2920lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSH LW2 58
LSH LN2 58

Structure

white
black

Certificazioni

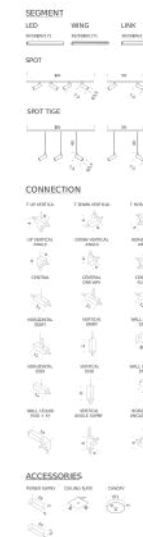

DESK MATRIX | 114X44CM - VERTICAL 2700K

LAMPING

Source	Linear LED
Total power	50W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	2920lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW2 58
LSV LN2 58

Structure

white
black

Certificazioni

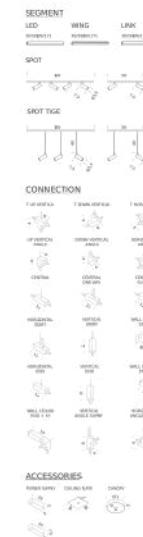

DESK MATRIX | 114X44CM - HORIZONTAL 3000K

LAMPING

Source	Linear LED
Total power	50W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	2920lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSH LW3 58
LSH LN3 58

Structure

white
black

Certificazioni

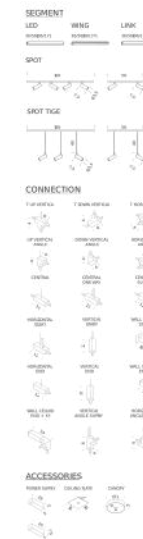

DESK MATRIX | 114X44CM - VERTICAL 3000K

LAMPING

Source	Linear LED
Total power	50W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	2920lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW3 58
LSV LN3 58

Structure

white
black

Certificazioni

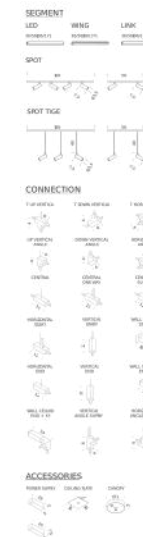

DESK MATRIX | 178X44CM - HORIZONTAL 2700K

LAMPING

Source	Linear LED
Total power	78W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	4200lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSH LW2 5A
LSH LN2 5A

Structure

white
black

Certificazioni

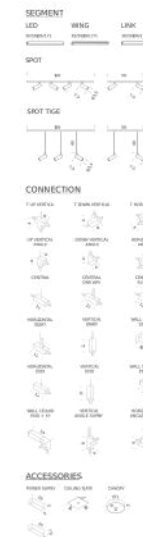

DESK MATRIX | 178X44CM - VERTICAL 2700K

LAMPING

Source	Linear LED
Total power	78W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	4200lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW2 5A
LSV LN2 5A

Structure

white
black

Certificazioni

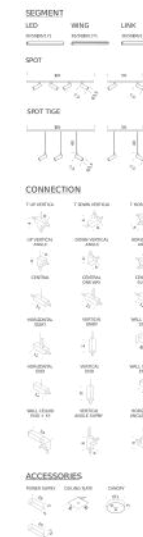

DESK MATRIX | 178X44CM - HORIZONTAL 3000K

LAMPING

Source	Linear LED
Total power	78W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	4200lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m

Codes

LSH LW3 5A
LSH LN3 5A

Structure

white
black

Certificazioni



DESK MATRIX | 178X44CM - VERTICAL 3000K

LAMPING

Source	Linear LED
Total power	78W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	4200lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW3 5A
LSV LN3 5A

Structure

white
black

Certificazioni

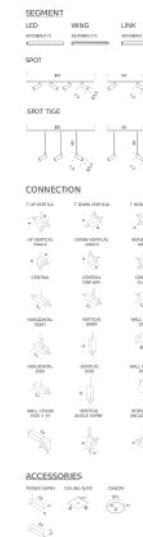

DESK MATRIX | 64X64CM - HORIZONTAL 2700K

LAMPING

Source	Linear LED
Total power	38W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	2400lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSH LW2 52
LSH LN2 52

Structure

white
black

Certificazioni

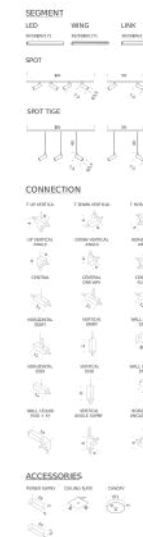

DESK MATRIX | 64X64CM - VERTICAL 2700K

LAMPING

Source	Linear LED
Total power	38W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	2400lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m

Codes

LSV LW2 52
LSV LN2 52

Structure

white
black

Certificazioni



DESK MATRIX | 64X64CM - HORIZONTAL 3000K

LAMPING

Source	Linear LED
Total power	38W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	2400lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSH LW3 52
LSH LN3 52

Structure

white
black

Certificazioni

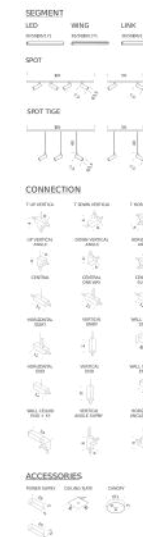

DESK MATRIX | 64X64CM - VERTICAL 3000K

LAMPING

Source	Linear LED
Total power	38W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	2400lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW3 52
LSV LN3 52

Structure

white
black

Certificazioni

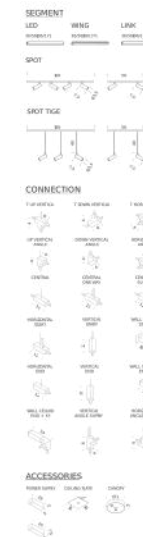

DESK MATRIX | 114X64CM - HORIZONTAL 2700K

LAMPING

Source	Linear LED
Total power	57W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	3450lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m

Codes

LSH LW2 56
LSH LN2 56

Structure

white
black

Certificazioni



DESK MATRIX | 114X64CM - VERTICAL 2700K

LAMPING

Source	Linear LED
Total power	57W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	3450lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW2 56
LSV LN2 56

Structure

white
black

Certificazioni

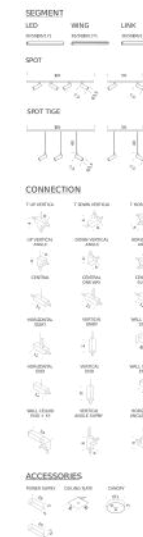

DESK MATRIX | 114X64CM - HORIZONTAL 3000K

LAMPING

Source	Linear LED
Total power	57W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	3450lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSH LW3 56
LSH LN3 56

Structure

white
black

Certificazioni

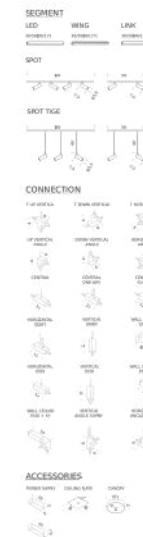

DESK MATRIX | 114X64CM - VERTICAL 3000K

LAMPING

Source	Linear LED
Total power	57W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	3450lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m

Codes

LSV LW3 56
LSV LN3 56

Structure

white
black

Certificazioni



DESK MATRIX | 178X64CM - HORIZONTAL 2700K

LAMPING

Source	Linear LED
Total power	85W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	4730lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSH LW2 59
LSH LN2 59

Structure

white
black

Certificazioni

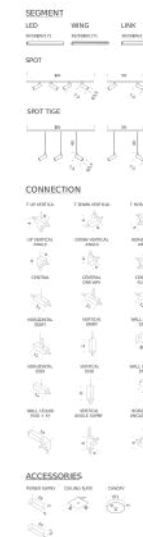

DESK MATRIX | 178X64CM - VERTICAL 2700K

LAMPING

Source	Linear LED
Total power	85W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	4730lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW2 59
LSV LN2 59

Structure

white
black

Certificazioni

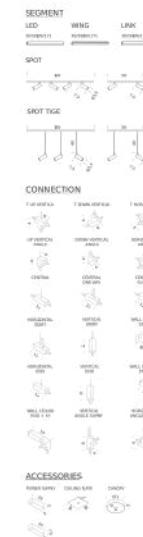

DESK MATRIX | 178X64CM - HORIZONTAL 3000K

LAMPING

Source	Linear LED
Total power	85W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	4730lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m

Codes

LSH LW3 59
LSH LN3 59

Structure

white
black

Certificazioni



DESK MATRIX | 178X64CM - VERTICAL 3000K

LAMPING

Source	Linear LED
Total power	85W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	4730lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m

Codes

LSV LW3 59
LSV LN3 59

Structure

white
black

Certificazioni



DESK MATRIX | 114X114CM - HORIZONTAL 2700K

LAMPING

Source	Linear LED
Total power	76W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	4500lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSH LW2 53
LSH LN2 53

Structure

white
black

Certificazioni

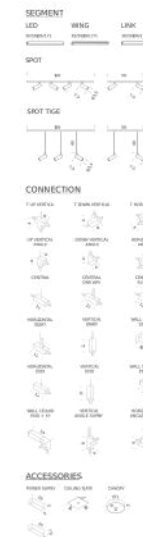

DESK MATRIX | 114X114CM - VERTICAL 2700K

LAMPING

Source	Linear LED
Total power	76W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	4500lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW2 53
LSV LN2 53

Structure

white
black

Certificazioni

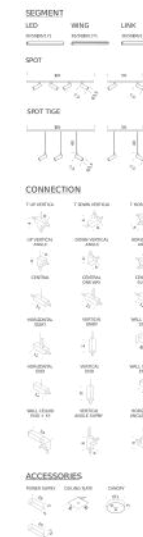

DESK MATRIX | 114X114CM - HORIZONTAL 3000K

LAMPING

Source	Linear LED
Total power	76W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	4500lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSH LW3 53
LSH LN3 53

Structure

white
black

Certificazioni

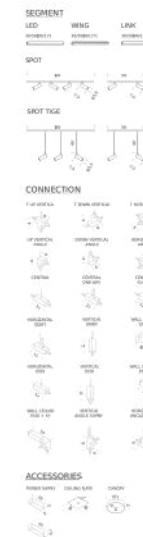

DESK MATRIX | 114X114CM - VERTICAL 3000K

LAMPING

Source	Linear LED
Total power	76W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	4500lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m

Codes

LSV LW3 53


LSV LN3 53

Structure

white

black

Certificazioni

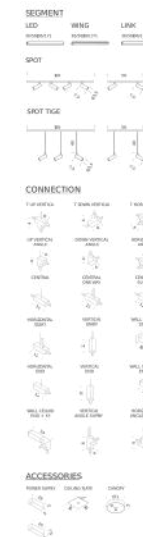

DESK MATRIX | 178X114CM - HORIZONTAL 2700K

LAMPING

Source	Linear LED
Total power	104W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	5780lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSH LW2 57
LSH LN2 57

Structure

white
black

Certificazioni

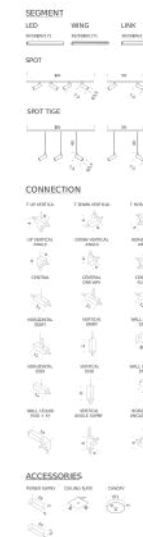

DESK MATRIX | 178X114CM - VERTICAL 2700K

LAMPING

Source	Linear LED
Total power	104W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	5780lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW2 57
LSV LN2 57

Structure

white
black

Certificazioni

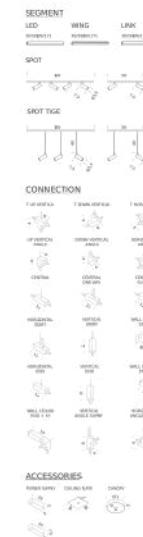

DESK MATRIX | 178X114CM - HORIZONTAL 3000K

LAMPING

Source	Linear LED
Total power	104W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	5780lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSH LW3 57
LSH LN3 57

Structure

white
black

Certificazioni

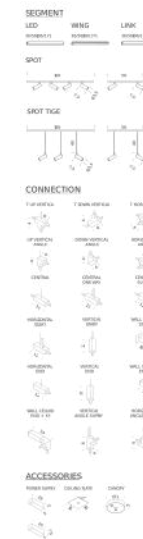

DESK MATRIX | 178X114CM - VERTICAL 3000K

LAMPING

Source	Linear LED
Total power	104W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	5780lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW3 57
LSV LN3 57

Structure

white
black

Certificazioni

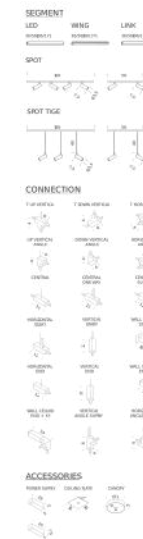

DESK MATRIX | 178X178CM - HORIZONTAL 2700K

LAMPING

Source	Linear LED
Total power	132W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	7060lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m

Codes

LSH LW2 54
LSH LN2 54

Structure

white
black

Certificazioni



DESK MATRIX | 178X178CM - VERTICAL 2700K

LAMPING

Source	Linear LED
Total power	132W
Emission	diffused, orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	7060lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW2 54
LSV LN2 54

Structure

white
black

Certificazioni

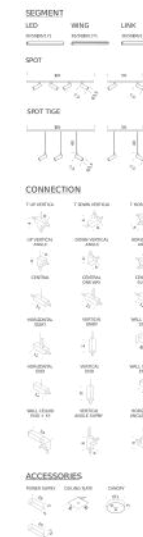

DESK MATRIX | 178X178CM - HORIZONTAL 3000K

LAMPING

Source	Linear LED
Total power	132W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	7060lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m

Codes

LSH LW3 54
LSH LN3 54

Structure

white
black

Certificazioni



DESK MATRIX | 178X178CM - VERTICAL 3000K

LAMPING

Source	Linear LED
Total power	132W
Emission	diffused, orientable 360°
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	7060lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	driver included, adjustable cable length max 3m


Codes

LSV LW3 54
LSV LN3 54

Structure

white
black

Certificazioni

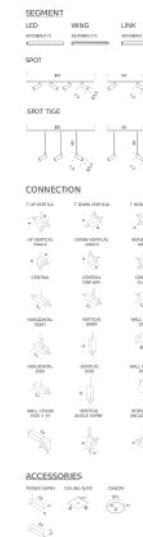

POWER SUPPLY | 60W 1-10V

LAMPING

Tension 110/240V

Codes

LSS PW6 51


LSS PN6 51

Structure

white

black

Certificazioni

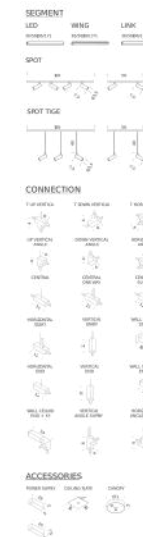

POWER SUPPLY | 90W 1-10V

LAMPING

Tension 110/240V

Codes

LSS PW9 51

LSS PN9 51

Structure

white

black

Certificazioni



CEILING PLATE

LAMPING

Materials

aluminum

Codes

LSS PWR 51

LSS PNR 51

Structure

white

black

Certificazioni



CANOPY

LAMPING

Materials metal

Codes

ROS KWW 51

ROS KNN 51

Structure

white

black

Certificazioni



REMOTE DRIVERS | 1-10V 25W

LAMPING

Tension 110/240V

Codes

LIN ALI 32

Structure

Certificazioni



REMOTE DRIVERS | 1-10V 60W

LAMPING

Tension 110/240V

Codes

LIN ALI 31

Structure

Certificazioni



REMOTE DRIVERS | 1-10V 90W

LAMPING

Tension 110/240V

Codes

LIN ALI 34

Structure

Certificazioni



REMOTE DRIVERS | 1-10V 150W

LAMPING

Tension 110/240V

Codes

LIN ALI 35

Structure

Certificazioni



REMOTE DRIVERS | 1-10V 185W

LAMPING

Tension 110/240V

Codes

LIN ALI 36

Structure

Certificazioni



REMOTE DRIVERS | 1-10V 240W

LAMPING

Tension 110/240V

Codes

LIN ALI 37

Structure

Certificazioni



REMOTE DRIVERS | 1-10V 320W

LAMPING

Tension 110/240V

Codes

LIN ALI 38

Structure

Certificazioni



REMOTE DRIVERS | DALI 100W

LAMPING

Tension 110/240V

Codes

LIN ALI 51

Structure

Certificazioni



REMOTE DRIVERS | DALI 150W

LAMPING

Tension 110/240V

Codes

LIN ALI 52

Structure

Certificazioni



REMOTE DRIVERS | DALI 200W

LAMPING


Tension 110/240V

Codes

LIN ALI 53

Structure

Certificazioni

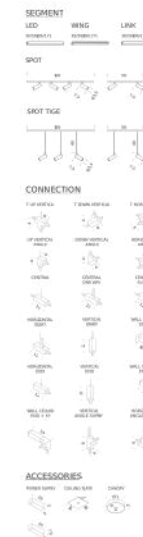

REMOTE DRIVERS | DALI 240W

LAMPING

Tension 110/240V

Codes

LIN ALI 54

Structure

Certificazioni



REMOTE DRIVERS | EMPTY BOX

LAMPING

Codes

ROS LNN 51
ROS LWW 51

Structure

black
white

Certificazioni

